


1st Out

By **MUNCKHOF**

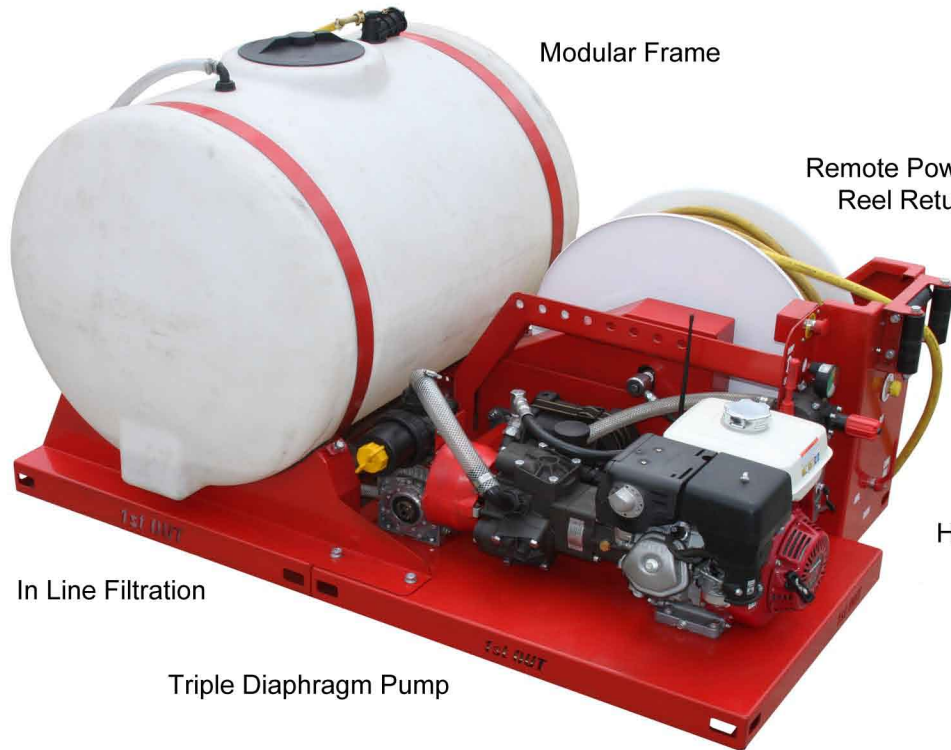

Modular Frame

Remote Powered
Reel Return

Tie Down Pockets

Hanging Hitch Points

In Line Filtration

Triple Diaphragm Pump

Open Access



Self Priming
Venturi Suction

Steel Braided Hose

4 Roller Fairlead

Auxillary Out

Intuitive Control

Munckhof Manufacturing

Box 308
Oliver British Columbia
VOH 1T0

Tel: 250.498.4426

Fax: 250.498.4460

Email: office@munckhof.com

www.munckhof.com

Battery Disconnect

Honda Motor

Central Operating Station

1st Out



The 1st Out machine is a high pressure, low volume system designed as a versatile tool for initial attacks, brush fires, lightning strikes and patrolling hot spots.

Small enough to fit into a short bed pickup, yet with enough power to make a serious impact on a fire scene. 1st Out is an extremely useful tool for any interface area where speed is crucial and resources are often limited.

The pump is a triple diaphragm type, impervious to tank mix products and capable of producing 50lt/min at over 500PSI. This is enough pressure to remove needles, leaves and brush with the straight stream, effectively creating a light fire guard without labour intensive digging. This low volume system will allow for over 20 minutes of straight streaming water before requiring fill.

The hose reel is loaded with 250 feet of hose. The Gauntlet series hose is rated to 3000PSI, and has a rugged covering that can withstand dragging around rocks and snags.

The frame is a modular design for versatility. Use our 600L tank, connect to an existing rig, or have us create something custom.



The hose reel is mechanically powered by the motor and can be activated by pressing the return button on the control panel, or by using the remote. The powerful reel can be used to assist the operator while moving through rough and steep terrain.



The 1st Out is equipped with a draft type suction system. By taking high pressure water from the pump and shooting it through a venturi, this machine can pull water from up to 15ft below and fill its 600 litre tank in less than 7 minutes. Supplied are 25 feet of 1 1/2" hose with a basket strainer and float.

All controls are centrally located at the end of the machine, and are clearly labeled to make using the machine intuitive. A battery disconnect ensures that the battery doesn't drain while not in use. The auxiliary port allows for connection with garden hose thread for further utility.



By using name brand components like Honda, AR, GoodYear and Interstate we try our best to limit machine failure when you need it most. Every part of the 1st Out machine is rated for heavy duty use.

The best way to stop a big fire is to stop it while its still a small fire